



CATEGORY :

Type : Ceiling Recessed Spot Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
Finish : White
Protection : IP20

DIMENSION :

Diameter : Ø35mm
Cut Out : Ø28mm
Depth : 58mm

OPTICAL SYSTEM

Type : Lens
Beam Angle : Medium
Beam Direction : Down
Tilt : No
Swivel : No
Efficiency : High
Material : PC

CONTROL

Switching
Dimming :
Non Dimmable

ELECTRICAL PARAMETER / CHARACTERISTIC :

- Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current



Input Power : 4W
Output Power : 3W
Power Factor : >0.9
THD : <15%
Control Gear : Remote Along With Fixture

LED DETAIL :

Light Source Type : Hi-Power
Light Source Make : Pro Light
Wattage : 3W
Driving Current : 5V-700ma
Color Temp : 3000K, 4000K, 6000K CCT
Color Rendering Index (CRI) : >80
Lumen : 3K(255lm), 4K(263lm), 6K(271lm)
Efficacy : 85lm/W
LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels

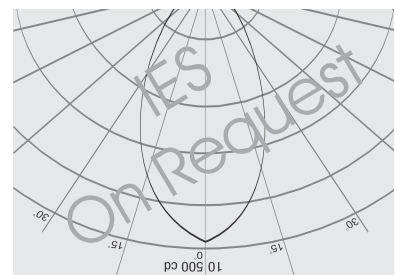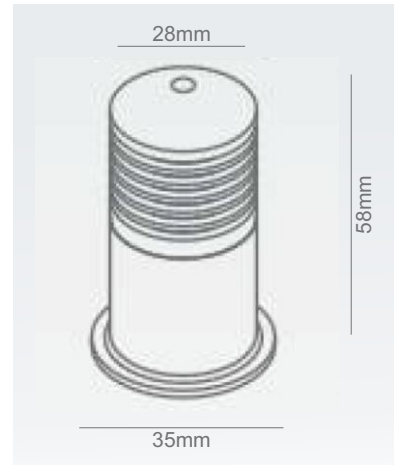

Project Detail : _____

Ref : _____

Date : _____

Rev : _____