



Cat. No : **NL 1414**

### CATEGORY :

Type : Ceiling Recessed Fixed Spot Light

### PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast  
Finish : White  
Protection : IP20

### DIMENSION :

Diameter : 147x45mm  
Cut Out : 140x37mm  
Depth : 49mm

### OPTICAL SYSTEM

Type : Reflector  
Beam Angle : Medium  
Beam Direction : Fixed  
Tilt : No  
Swivel : No  
Efficiency : High  
Material : PC

### CONTROL

Switching  
Dimming :  
1-10 Analog  
0-10 Analog  
DSI  
Dali  
Triac  
Leading & Trailing

### ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz  
Constant Current

Input Power : 11W  
Output Power : 10W  
Power Factor : >0.96  
THD : <15%



Control Gear : Remote Along With Fixture

### LED DETAIL :

Light Source Type : Hi-Power  
Light Source Make : Cree  
Wattage : 10W  
Driving Current : 20V-500ma  
Color Temp : 3000K, 4000K, 6000K CCT  
Color Rendering Index (CRI) : >80  
Lumen : 3K(1050lm), 4K(1080lm), 6K(1110lm)  
Efficacy : 105lm/W  
LED Life : 40,000 Hrs.

### APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels
- Bar

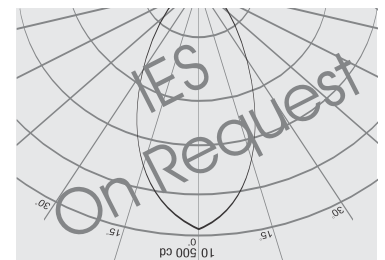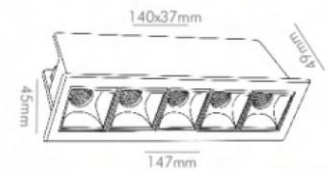

Project Detail : \_\_\_\_\_

Ref : \_\_\_\_\_

Date : \_\_\_\_\_

Rev : \_\_\_\_\_

