



Cat. No : **NL 1332**

### CATEGORY :

Type : Ceiling Surface LED Track Light

### PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast  
 Finish : White (Other Colors Available On Request)  
 Protection : IP20

### DIMENSION :

Outer : Ø71mm  
 Height : 185mm

### OPTICAL SYSTEM

Type : Reflector  
 Beam Angle : Narrow, Medium, Wide  
 Beam Direction :  
 Tilt : 90°  
 Swivel : 350°  
 Efficiency : High  
 Material : PC

### CONTROL

Switching  
 Dimming :  
 1-10 Analog  
 0-10 Analog  
 Dali  
 Triac  
 Leading & Trailing

### ELECTRICAL PARAMETER / CHARACTERISTIC :



Driver Input Voltage : 100-240V AC 50/60Hz  
 Constant Current  
 Input Power : 22W  
 Output Power: 20W  
 Power Factor : >0.96  
 THD : <15%  
 Control Gear : Remote Along With Fixture

### LED DETAIL :

Light Source Type : COB  
 Light Source Make : Citizen | Samsung  
 Wattage : 20W | 15W  
 Driving Current : 40V-600ma  
 Color Temp : 3000K, 4000K, 6000K CCT  
 Color Round Index (CRI) : >80  
 Lumen : 20W-3K(2200lm), 4K(2260lm), 6K(2334lm)  
 15W-3K(1650lm), 4K(1700lm), 6K(1751lm)  
 Efficacy : 110lm/W  
 LED Life : 40,000 Hrs.

### APPLICATIONS :

- Hotels
- Bars
- Commercial Lighting
- Residential Lighting

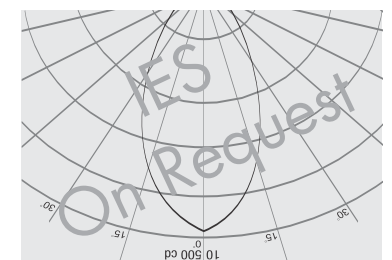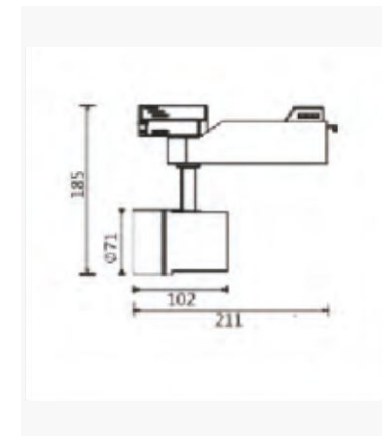

Project Detail : \_\_\_\_\_

Ref : \_\_\_\_\_

Date : \_\_\_\_\_

Rev : \_\_\_\_\_





Cat. No : **NL 1332**

#### CATEGORY :

Type : Ceiling Surface LED Track Spot Light

#### PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast  
Finish : White  
Protection : IP20

#### DIMENSION :

Outer : Ø71mm  
Height : 185mm

#### OPTICAL SYSTEM

Type : Reflector  
Beam Angle : Medium  
Beam Direction :  
Tilt : 90°  
Swivel : 350°  
Efficiency : High  
Material : PC

#### CONTROL

Switching  
Dimming :  
1-10 Analog  
0-10 Analog  
Dali  
Triac  
Leading & Trailing

#### ELECTRICAL PARAMETER / CHARACTERISTIC :



Driver Input Voltage : 100-240V AC 50/60Hz  
Constant Current  
Input Power : 11W  
Output Power : 10W  
Power Factor : >0.96  
THD : <15%  
Control Gear : Remote Along With Fixture

#### LED DETAIL :

Light Source Type : COB  
Light Source Make : Citizen  
Wattage : 10W  
Driving Current : 40V-220ma  
Color Temp : 3000K, 4000K, 6000K CCT  
Color Round Index (CRI) : >80  
Lumen : 3K(1100lm), 4K(1133lm), 6K(1165lm)  
Efficacy : 110lm/W  
LED Life : 40,000 Hrs.

#### APPLICATIONS :

- Hotels
- Bars
- Commercial Lighting
- Residential Lighting

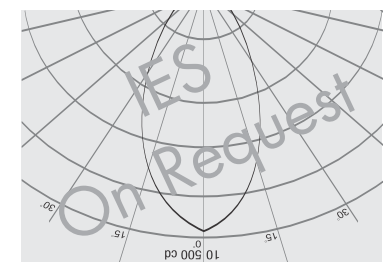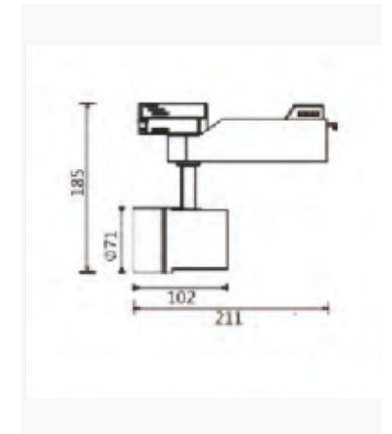

Project Detail : \_\_\_\_\_

Ref : \_\_\_\_\_

Date : 12-June-2019

Rev : \_\_\_\_\_





#### CATEGORY :

Type : Ceiling Surface LED Track Light

#### PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast  
 Finish : White (Other Colors Available On Request)  
 Protection : IP20

#### DIMENSION :

Outer : Ø71mm  
 Height : 185mm

#### OPTICAL SYSTEM

Type : Reflector  
 Beam Angle : Narrow, Medium, Wide  
 Beam Direction :  
 Tilt : 90°  
 Swivel : 350°  
 Efficiency : High  
 Material : PC

#### CONTROL

Switching  
 Dimming :  
 1-10 Analog  
 0-10 Analog  
 Dali  
 Triac  
 Leading & Trailing

#### ELECTRICAL PARAMETER / CHARACTERISTIC :



Driver Input Voltage : 100-240V AC 50/60Hz  
 Constant Current  
 Input Power : 22W  
 Output Power : 20W  
 Power Factor : >0.96  
 THD : <15%  
 Control Gear : Remote Along With Fixture

#### LED DETAIL :

Light Source Type : COB  
 Light Source Make : Citizen  
 Wattage : 20W  
 Driving Current : 40V-500ma  
 Color Temp : 3000K, 4000K, 6000K CCT  
 Color Round Index (CRI) : >80  
 Lumen : 3K(2200lm), 4K(2265lm), 6K(2335lm)  
 Efficacy : 110lm/W  
 LED Life : 40,000 Hrs.

#### APPLICATIONS :

- Hotels
- Bars
- Commercial Lighting
- Residential Lighting

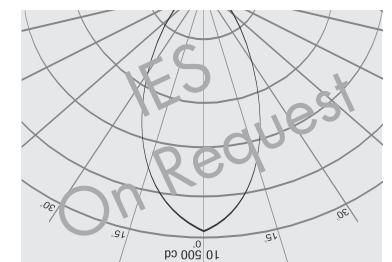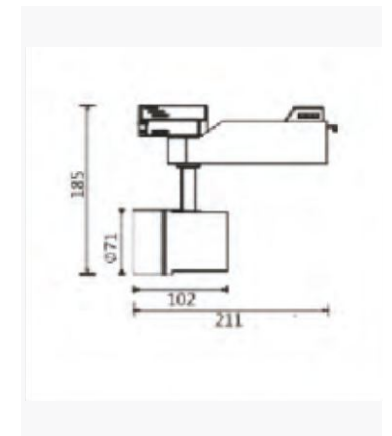

Project Detail : \_\_\_\_\_

Ref : \_\_\_\_\_

Date : 06-Dec-2018

Rev : \_\_\_\_\_

