



Cat. No : **NL 1403**

OPTICAL SYSTEM

Type : Reflector
 Beam Angle : Medium
 Beam Direction : Fixed
 Tilt : No
 Swivel : No
 Efficiency : High
 Material : PC

CONTROL

Switching
 Dimming :
 1-10 Analog
 0-10 Analog
 Dsi
 Dali
 Triac
 Leading & Trailing

DIMENSION :

Diameter : Ø8106mm
 Cut Out : Ø112mm
 Depth : 113mm

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
 Finish : White (Other Color Available On Request)
 Protection : IP20

ELECTRICAL PARAMETER / CHARACTERISTIC :



Driver Input Voltage : 100-240V AC 50/60Hz
 Constant Current
 Input Power : 15W
 Output Power : 14W
 Power Factor : >0.96
 THD : <15%
 Control Gear : Remote Along With Fixture

LED DETAIL :

Light Source Type : COB
 Light Source Make : Citizen
 Wattage : 15W
 Driving Current : 40V-350ma
 Color Temp : 3000K, 4000K, 6000K CCT
 Color Rendering Index (CRI) : >80
 Lumen : 3K(1425lm), 4K(1465lm), 6K(1510lm)
 Efficacy : 105lm|W
 LED Life : 40,000 Hrs.

CATEGORY :

Type : Trimless Recessed Down Light

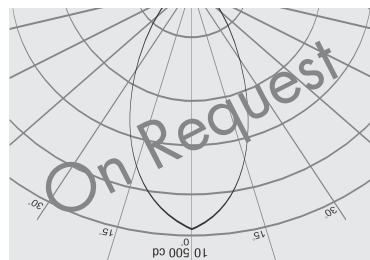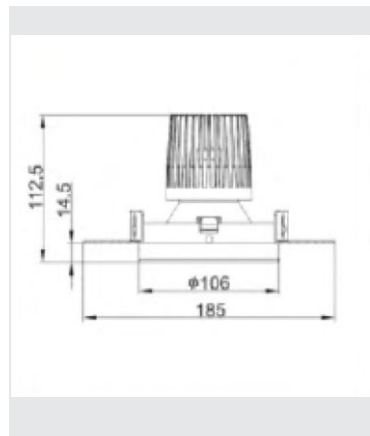

Project Detail : _____

Ref : _____

Date : _____

Rev : _____





Cat. No : **NL 1403**

CATEGORY :

Type : Trimless fixed Down Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
 Finish : White (Other Color Available On Request)
 Protection : IP20

DIMENSION :

Diameter : Ø8106mm
 Cut Out : Ø112mm
 Depth : 113mm

OPTICAL SYSTEM

Type : Reflector
 Beam Angle : Medium
 Beam Direction : Fixed
 Tilt : No
 Swivel : No
 Efficiency : High
 Material : PC

CONTROL

Switching
 Dimming :
 1-10 Analog
 0-10 Analog
 Dsi
 Dali
 Triac
 Leading & Trailing

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
 Constant Current



Input Power : 20W
 Output Power : 18W
 Power Factor : >0.96
 THD : <15%
 Control Gear : Remote Along With Fixture

LED DETAIL :

Light Source Type : COB
 Light Source Make : Citizen Gen6
 Wattage : 18W
 Driving Current : 40V-400ma
 Color Temp : 3000K, 4000K, 6000K CCT
 Color Rendering Index (CRI) : >80
 Lumen : 3K(1980lm), 4K(2040lm), 6K(2100lm)
 Efficacy : 110lm|W
 LED Life : 40,000 Hrs.

APPLICATION

- Showroom
- Offices
- Residences
- Hotels

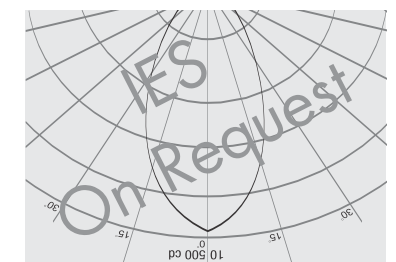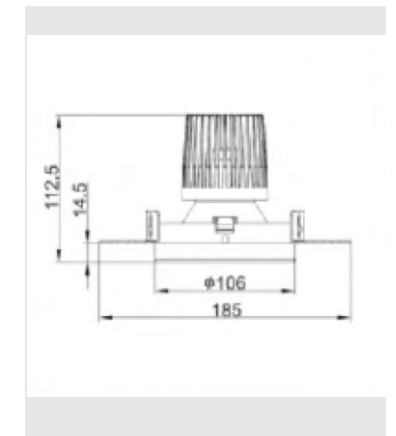

Project Detail : _____

Ref : _____

Date : 03-Sept-2018

Rev : _____

