



Cat. No : **NL 1446**

CATEGORY :

Type : LED Spot Down Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
Finish : White
Protection : IP20

DIMENSION :

Diameter : 90mm
Cut Out : Ø83mm
Depth : 125mm

OPTICAL SYSTEM

Type : Reflector
Beam Angle : Medium
Beam Direction :
Tilt : Yes
Swivel : No
Efficiency : High Efficiency
Material : PC

CONTROL

Switching
Dimming :
1-10 Analog
0-10 Analog
Dsi
Dali
Triac
Leading & Trailing

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current
Input Power : 14W
Output Power : 13W
Power Factor : >0.96
THD : <15%
Control Gear : Remote Along With Fixture

LED DETAIL :



Light Source Type : Hi-Power | Samsung
Wattage : 13W
Driving Current : 40V-280ma
Color Temp : 3000K, 4000K, 6000K CCT
Color Rendering Index (CRI) : >80
Lumen : 3K(1430lm), 4K(1473lm), 6K(1517lm)
Efficacy : 110lm/W
LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels

OTHER FUTURES :

- Dimmable & Non Dimmable Options
- Non - Flickering
- Easy Installation
- Creates Better Lighting Effect

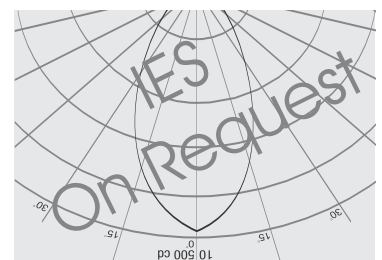

Project Detail : _____

Ref : _____

Date : _____

Rev : _____

