



Cat. No : **NL 1464**

CATEGORY :

Type : Ceiling Surface Down Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
Finish : White (Other Colors Available On Request)
Protection : IP20

DIMENSION :

Diameter : 100x100mm
Depth : 100mm

OPTICAL SYSTEM

Type : Reflector
Beam Angle : Medium
Beam Direction :
Tilt : 30°
Swivel : 355°
Efficiency :
Material : PC

CONTROL

Switching
Dimming :
Non Dimmable


ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current


Input Power : 9w
Output Power : 8w
Power Factor : >0.96
THD : <15%
Control Gear : Remote Along With Fixture

LED DETAIL :

Light Source Type : COB
Light Source Make : Citizen
Wattage : 8W
Driving Current : 40V-175ma
Color Temp : 3000K | 4000K | 6000K
Color Rendering Index (CRI) : >80
Lumen : 880lm
Efficacy : 110w/lm
LED Life : 40,000 Hrs.

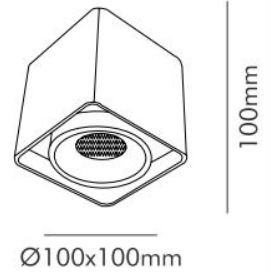

Ø100x100mm

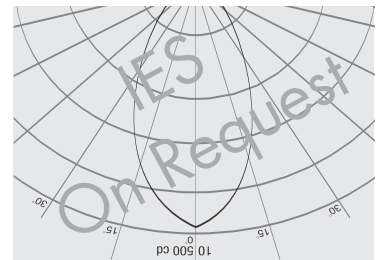

Project Detail : _____

Ref : _____

Date : _____

Rev : _____

