



Cat. No : **NL 1425**

CATEGORY :

Type : Ceiling Recessed Fixed Spot Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
Finish : White
Protection : IP20

DIMENSION :

Diameter : 130x54mm
Cut Out : 52mm
Depth : 125x49mm

OPTICAL SYSTEM

Type : Reflector
Beam Angle : Medium
Beam Direction : Fixed
Tilt : No
Swivel : No
Efficiency : High
Material : PC

CONTROL

Switching
Dimming :
1-10 Analog
0-10 Analog
DSI
Dali
Triac
Leading & Trailing

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current



Input Power : 13W
Output Power : 12W
Power Factor : >0.96
THD : <15%
Control Gear : Remote Along With Fixture

LED DETAIL :

Light Source Type : Hi-Power
Light Source Make : Cree
Wattage : 12W
Driving Current :
Color Temp : 3000K, 4000K, 6000K CCT
Color Rendering Index (CRI) : >80
Lumen : 3K(1260lm), 4K(1297lm), 6K(1336lm)
Efficacy : 105lm/W
LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels
- Bar

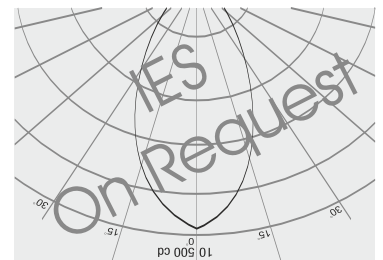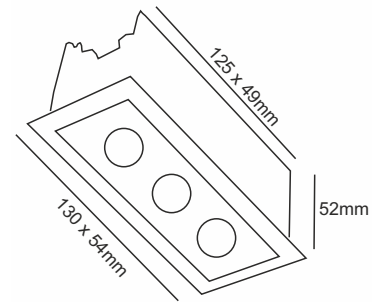

Project Detail : _____

Ref : _____

Date : _____

Rev : _____

