



Cat. No : **NL 1454**

CATEGORY :

Type : LED Trim Less Down Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
Finish : White (Other Color Available On Request)
Protection : IP20

DIMENSION :

Diameter : 84x84mm
Cut Out : Ø110x110mm
Depth : 76mm

OPTICAL SYSTEM

Type : Reflector
Beam Angle : Narrow | Medium | Wide
Beam Direction :
Tilt : No
Swivel : No
Efficiency : High Efficiency
Material : PC

CONTROL

Switching
Dimming :
1-10 Analog
0-10 Analog
Dsi
Dali
Triac
Leading & Trailing

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current

Input Power : 6W
Output Power : 5W
Power Factor : >0.96
THD : <15%
Control Gear : Remote Along With Fixture

LED DETAIL :



Light Source Type : Hi-Power
Wattage : 5W
Driving Current : 15V-400ma
Color Temp : 3000K, 4000K, 6000K CCT
Color Rendering Index (CRI) : >80
Lumen : 3K(550lm), 4K(565lm), 6K(585lm)
Efficacy : 110lm/W
LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels

OTHER FUTURES :

- Dimmable & Non Dimmable Options
- Non - Flickering
- Easy Installation
- Creates Better Lighting Effect

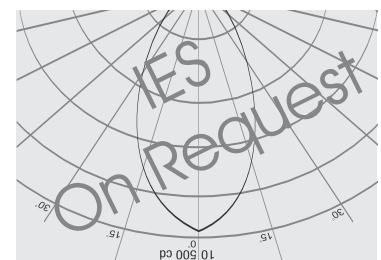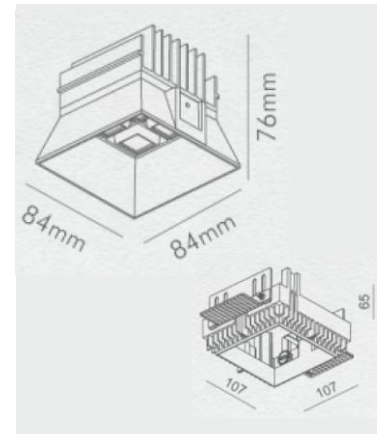

Project Detail : _____

Ref : _____

Date : _____

Rev : _____





Cat. No : **NL 1454**

CATEGORY :

Type : LED Trim Less Down Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
Finish : White (Other Color Available On Request)
Protection : IP20

DIMENSION :

Diameter : 84x84mm
Cut Out : Ø110x110mm
Depth : 76mm

OPTICAL SYSTEM

Type : Reflector
Beam Angle : Narrow | Medium | Wide
Beam Direction :
Tilt : No
Swivel : No
Efficiency : High Efficiency
Material : PC

CONTROL

Switching
Dimming :
1-10 Analog
0-10 Analog
Dsi
Dali
Triac
Leading & Trailing

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current
Input Power : 16W
Output Power : 15W
Power Factor : >0.96
THD : <15%
Control Gear : Remote Along With Fixture

LED DETAIL :



Light Source Type : Hi-Power
Wattage : 15W
Driving Current : 15V-950ma
Color Temp : 3000K, 4000K, 6000K CCT
Color Rendering Index (CRI) : >80
Lumen : 3K(1650lm), 4K(1700lm), 6K(1750lm)
Efficacy : 110lm/W
LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels

OTHER FUTURES :

- Dimmable & Non Dimmable Options
- Non - Flickering
- Easy Installation
- Creates Better Lighting Effect

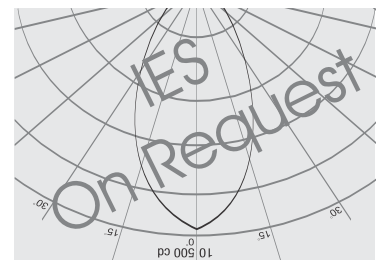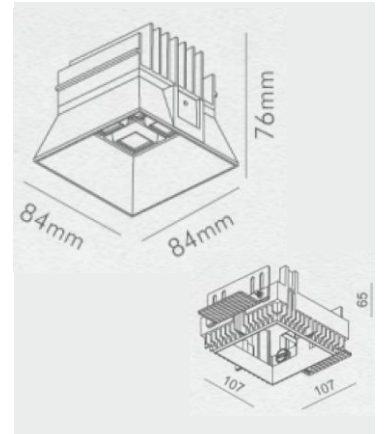

Project Detail : _____

Ref : _____

Date : 04-Sep-2018

Rev : _____

