



Cat. No : **NL 1510**

#### CATEGORY :

Type : Recessed Adjustable Down Light

#### PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast  
Finish : White  
Protection : IP20

#### DIMENSION :

Diameter : 60mm  
Cut Out : 54mm  
Depth : 80mm

#### OPTICAL SYSTEM

Type : Chrome Reflector  
Beam Angle : Narrow | Medium  
Beam Direction : Down  
Tilt : Yes  
Swivel : Yes  
Efficiency : High  
Material : PC

#### CONTROL

Switching  
Dimming :  
1-10 Analog  
0-10 Analog  
DSI  
Dali  
Triac  
Leading & Trailing

#### ELECTRICAL PARAMETER / CHARACTERISTIC :



Driver Input Voltage : 100-240V AC 50/60Hz  
Constant Current  
Input Power : 8W  
Output Power : 6W  
Power Factor : >0.96  
THD : <12%  
Control Gear : Remote Along With Fixture

#### LED DETAIL :

Light Source Type : COB  
Light Source Make : Citizen | Samsung  
Wattage : 6W  
Driving Current : 40V-175ma  
Color Temp : 3000K, 4000K, 6000K CCT  
Color Rendering Index (CRI) : >80  
Lumen : 3K(660lm), 4K(680lm), 6K(700lm)  
Efficacy : 110 | W  
LED Life : 40,000 Hrs.

#### APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels
- Bar

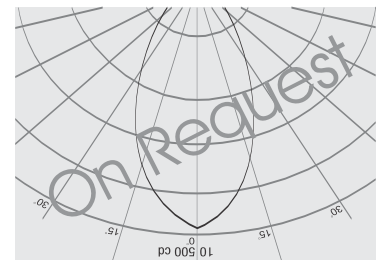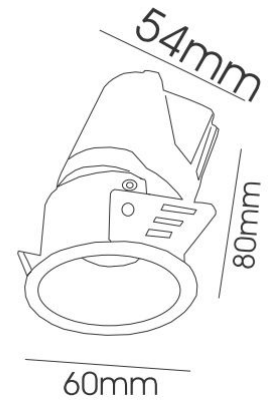

Project Detail : \_\_\_\_\_

Ref : \_\_\_\_\_

Date : \_\_\_\_\_

Rev : \_\_\_\_\_